



ADVANCED DOOR SYSTEMS


DESIGNERS & INTEGRATORS OF DOOR & DOCK SYSTEMS

1020 W. 14 MILE ROAD • CLAWSON, MI 48017 • PHONE 877-436-0302 • WWW.ADVANCEDSYSTEMSDOORS.COM

**INDUSTRIAL™
SERIES**

NORDOCK®

MECHANICAL DOCKLEVELERS

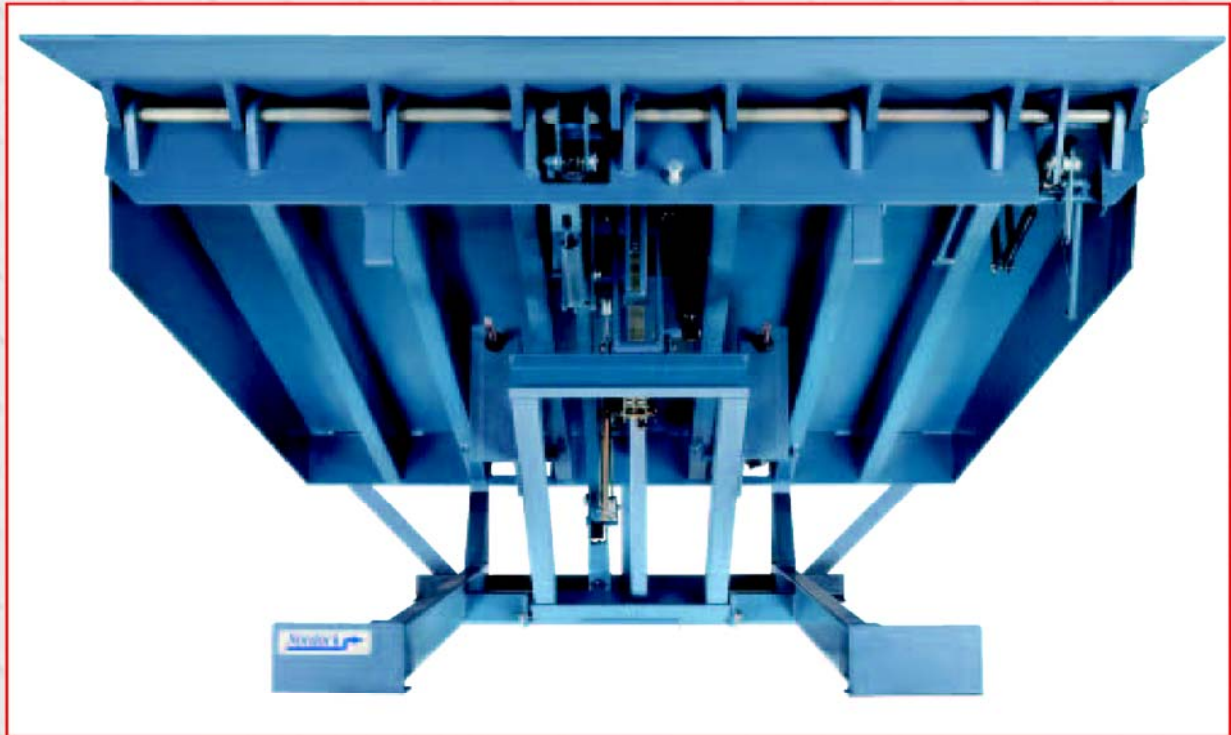

Available **TRUCK-LOCK™**
Safety Systems



Full Width Rear Hinge

FEATURE SUMMARY

- Exclusive Lip Lug and Header Plate Design Ensures Maximum Strength
- Auto-Sensing Holddown with Unlimited Float
- Center Position Holddown Eliminates Deck Twist for Level Storage
- Soft Release Activation
- Full Yielding Walkout Lip Extension
- Below Dock End Load Control
- Continuous Rear Hinge Assembly
- Seven Rear Structural Frame Supports
- Self Cleaning Lip Hinge
- Open Frame Design for Easy Pit Cleaning
- Retractable Solid Steel Deck Stops
- Integral Maintenance Supports
- Working Range Side Guards
- Zinc Plated Hinge Rods
- Center Deck Support

Dedicated People ~ Superior Products



ADVANCED DOOR SYSTEMS

DESIGNERS & INTEGRATORS OF DOOR & DOCK SYSTEMS

1020 W. 14 MILE ROAD • CLAWSON, MI 48017 • PHONE 877-436-0302 • WWW.ADVANCEDSYSTEMSDOORS.COM

INDUSTRIAL™ SERIES

NORDOCK®

SPECIFICATIONS

MECHANICAL DOCKLEVELERS

DESCRIPTION

The INDUSTRIAL™ Series mechanical docklevelers are the ultimate in strength, ease of use and reliability. Equipped with an exclusive lip lug and header plate design, easy release holdown with unlimited float and full yielding walkout lip extension for a smooth and efficient operation.

Available in capacity ratings from 20,000 to 50,000 lbs. in 5,000 lb. increments and standard nominal sizes of 6 feet wide x 6 feet long to 7 feet wide x 10 feet long. Standard features include working range side guards, retractable deck stop legs, night locks and a comprehensive warranty.

OPERATION

The operator releases the holdown at the rear of the platform until the deck is raised and stopped. The operator walks the platform down extending the lip onto the truck bed. The deck will float up and down with the truck during loading. The standard 16" long lip will extend out and engage a truck bed 12" above and below floor level.

CONSTRUCTION

The platform is a unitized welded structure with continuous welds at the beam, header plate and lug connections for maximum strength. The deck plate, lip plate, beam sections and lugs are constructed of minimum 50-55,000 PSI yield material.

A standard center deck beam and welded side guards provide additional deck plate support. The continuous rear hinge provides 4" of side-to-side tilt with no pinch point. The frame has seven solid steel rear supports, an open design for pit cleaning, and a night lock that prevents illegal entry when the door is closed. The front and rear hinge rods are SAE 1045 material, zinc plated and factory coated with anti-seize lubricant.

OPTIONS & ACCESSORIES

- TRUCK-LOCK™ Vehicle Restraint Systems
- FALL-STOP™ Safety Barrier Gates
- 18" or 20" Long Lip
- Brush Weather Seals
- Self Forming Pour in Pans
- Steel Spring & Steel Face Dock Bumpers
- Dock Lights



EXCLUSIVE LIP LUG & HEADER PLATE DESIGN

WARRANTY

Nordock guarantees that the INDUSTRIAL™ Series docklevelers will perform as described and to the full satisfaction of the purchaser for one-year from date of receipt or Nordock will repair, replace or remove the product and refund the purchase price. In addition, the front and rear hinge assemblies are guaranteed, under specified guidelines, for a period of twenty-years.

All Nordock docklevelers are designed to exceed the requirements of ANSI MH14.1 1984-87 and properly applied comes with a 10 year structural warranty.

MODELS & NOMINAL DIMENSIONS

Model*	Width	Length
NM-66	6'0"	6'0"
NM-68	6'0"	8'0"
NM-610	6'0"	10'0"
NM-6.56	6'6"	6'0"
NM-6.58	6'6"	8'0"
NM-6.510	6'6"	10'0"
NM-76	7'0"	6'0"
NM-78	7'0"	8'0"
NM-710	7'0"	10'0"

* Add capacity required from 20,000 to 50,000 lbs. Example: NM-66-35.